



Color Bar 36

Waterproof IP65



DecaLED® Color Bar 36 Product specification

Code	95154914	95154918	95154919
Description	DecaLED® Color Bar 36 WW with lens	DecaLED® Color Bar 36 VVV with lens	DecaLED® Color Bar 36 RGB with lens
Price	See pricelist	See pricelist	See pricelist
Voltage	230VAC		
Current	200mA		
Power consumption	40W		
Max. chainable	30		
Current at max. chain	6A		
Power cons. at max. chain	1200W		
Connection	8-pin IP67 rated connector		
Control	230VAC + DMX512		
LED properties	36 x 1W Luxeon LEDs per metre 10 x 35° lens		
Operating temp.	-10°C to +50°C		
Storage temp.	-20°C to +70°C		
Dimensions	1000 x 62 x 96 mm		
Weight	2300g		
IP rating	IP65		
Certification	CE		

The DecaLED® Color Bar 36 is a multicoloured, waterproof (IP65) line fitting, which is ideal for lighting interior or exterior walls, façades, floors and light boxes.


The DecaLED® Color Bar 36 is equipped with a fully sealed, waterproof (IP65) housing. The combination of the 36 Luxeon 1W LEDs with the 10 x 35° lenses provides a strong, homogeneous light over an area of approximately 8 metres. The DecaLED® Color Bar 36 needs to be connected to a 230VAC power supply. A maximum of 30 DecaLED® Color Bars 36 can therefore be linked together before a new DMX signal and power supply are required. The power consumption of the DecaLED® Color Bar 36 is approximately 40W. The product dimensions are 1000 x 62 x 96 mm (l x w x h).

Various accessories are available for the DecaLED® Color Bar 36, including the DecaLED® Color Wash/Bar Connection box, IP65 rated link cables of 1, 2 and 5 metres, end caps, and the DecaLED® Setup Tool (page 119).

In addition to the RGB version, we also offer a cool white and warm white version of this product. We can also produce an IP68 rated version upon request.

Accessories

Setup Tool	Cabling	Cabling	Cabling
Setup tool	Starter cable 3m open end	Link cable 2m	Link cable 5m
95350247 119	95753003	95753200	95753500
See pricelist	See pricelist	See pricelist	See pricelist
Connection	Terminator	Cabling	Cover
Connection Box	Terminator 120 Ohm	Link cable 1m	Cover for 8p connector, female
95753000	95753001	95753100	95771300
See pricelist	See pricelist	See pricelist	See pricelist
Connector	Connector	Cabling	Cabling
waterproof 8p connector, female	waterproof 8p connector, male	waterproof 8p cable, per metre	waterproof 8p cable, 100m reel
95771301	95771302	95771308	95771309
See pricelist	See pricelist	See pricelist	See pricelist

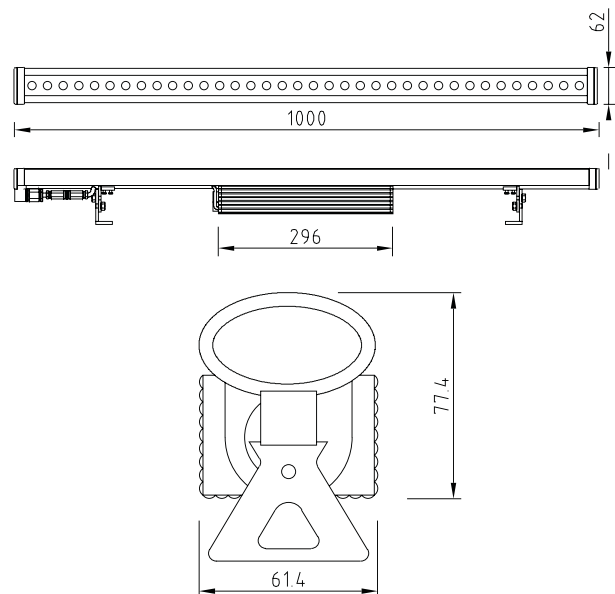


Waterproof IP65

RGB

Outdoor usage

Single colour

DecaLED® lighting products

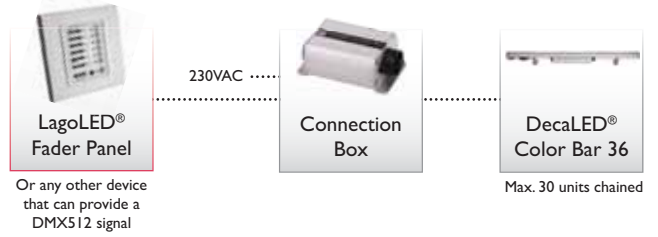

* For installations that require longer cable lengths please contact your sales representative or calculate this using the product information



Visit www.lagotronics.com for additional information about this product.

Villa Real
Monza, Italië