



Controller I



The DecaLED® Controller I was designed to control DecaLED® RGB Modules. The DecaLED® Controller I is ideal for use in small, closed rooms and combines a driver and power supply unit within a single housing.

The DecaLED® Controller I is a robust, professional LED controller, which can be used to control DecaLED® RGB Modules. The DecaLED® Controller I is suitable for controlling 50 DecaLED® RGB Modules per output. A total of 200 RGB Modules can be connected to the 8 outputs of the DecaLED® Controller I. The controller measures 356 x 148 x 71 mm (l x w x h) and must be connected to a supply voltage of 230VAC. On the front of the DecaLED® Controller there several DIP switches, with these a DMX address or one of ten programs can be selected.

The DecaLED® Controller I is supplied with a remote control and an external infra red eye, which enables you to easily recall a number of standard programs or colours from the memory. The Controller I can of course also be controlled via DMX. For a professional connection of the DMX signal there are 6 different lengths of XLR cabling available.

We offer a range of accessories for the DecaLED® Controller I, including starter cables, spare remote controls, a spare infrared eye, and the DecaLED® Setup Tool.

DecaLED® Controller I	
Product specification	
Code	95350243
Description	DecaLED® Controller I
Price	See pricelist
Voltage	100/240V AC
Current	1.4A at 230V AC / 3.1A at 100VAC
Power consumption	300 W total , 75 W per output
Control	DMX512, LagoLED® Fader Panel.
Dimensions	356x150x73 (l x b x h) mm
Weight	2750g
Info	Supplied with Remote Control and IR eye

Accessories

Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 1,5m	DecaLED® DMX Cable XLR-3, 3m	DecaLED® DMX Cable XLR-3, 6m	DecaLED® DMX Cable XLR-3, 10m
95780370	95780371	95780372	95780373
See pricelist	See pricelist	See pricelist	See pricelist


Cabling	Cabling	IR eye	Remote control
DecaLED® DMX Cable XLR-3, 15m	DecaLED® DMX Cable XLR-3, 20m	IR eye	Remote control
95780374	95780375	95321014	95321034
See pricelist	See pricelist	See pricelist	See pricelist

Accessories

Setup Tool	Cabling	Cabling	Cabling
Setup Tool	Link cable 10cm	Link cable 15cm	Link cable 50cm
95350247	95750300	95750302	95750303
See pricelist	See pricelist	See pricelist	See pricelist

Cabling	Cabling	Cabling	Cabling
Link cable 1m	Link cable 3m	Link cable 10m	Starter cable 50cm
95750304	95750306	95750399	95750305
See pricelist	See pricelist	See pricelist	See pricelist

Cabling	Cabling	Cabling
Starter cable 1m	Starter cable 3m	Starter cable 5m
95750310	95750330	95750350
See pricelist	See pricelist	See pricelist

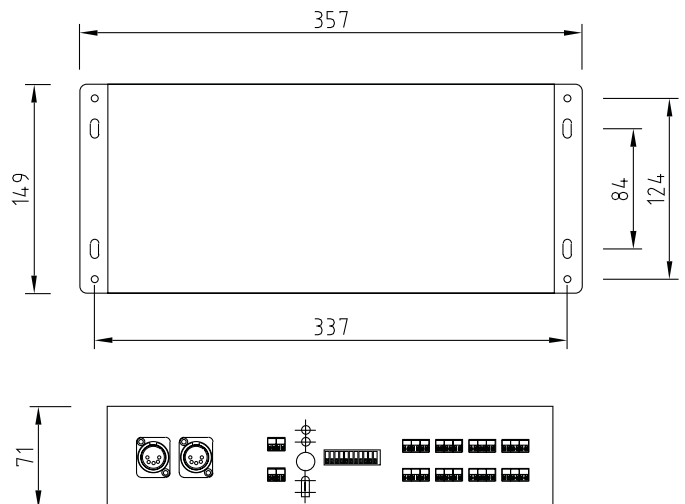

- Indoor usage
- Tv-proof
- Stand alone
- Direct DMX512

DecaLED® Controller I

This controller is suitable for use with the following products

Product	Max. total load	Max. load per output
DecaLED® RGB Module	200 pcs	50 pcs



Visit www.lagotronics.com for additional information about this product.

Free Funk Festival
Venlo, The Netherlands