



# Controller 2 Mini



The DecaLED® Controller 2 Mini offers a solution for controlling all dimmable 12VDC LED products. The DecaLED® Controller 2 Mini is ideal for use in small, closed rooms and combines a driver and power supply unit within a single housing.

The DecaLED® Controller 2 Mini is the small version of the DecaLED® Controller 2 and is the lightest version of the 12VDC controllers. The Controller 2 Mini is a professional LED controller, which can be used to control LED products that require a supply voltage of 12VDC. The DecaLED® Controller 2 Mini can handle a maximum load of 6A, with a maximum of 3A per output. The controller measures 243 x 150 x 73 mm (l x w x h) and must be connected to a supply voltage of 230VAC.

On the front of the DecaLED® Controller there several DIP switches, with these a DMX address or one of ten programs can be selected.

The DecaLED® Controller 2 Mini is supplied with a remote control and an external infrared eye which enables you to easily recall a number of standard programs or colours from the memory. The Controller 2 Mini can of course also be controlled via DMX. For a professional connection of the DMX signal there are 6 different lengths of XLR cabling available.

We offer a range of accessories for the DecaLED® Controller 2 Mini, including starter cables, spare remote controls, a spare infrared eye, and the DecaLED® Setup Tool.

In addition to the DecaLED® Controller 2 Mini, we also offer another controller for 12VDC products. This is the DecaLED® Controller 2, which has 8 outputs for controlling several channels, which can also handle a greater load.



DecaLED® Controller 2 Mini	
Product specification	
Code	95350122
Description	DecaLED® Controller 2 Mini for 12V applications
Price	See pricelist
Voltage	100-240V AC
Current	0.9A at 230V AC and 1.7A at 100V AC
Control	DMX512, LagoLED® Fader Panel, Remote control, dipswitches
Setup tool	Optional
LED properties	For all 12VDC LED products
Dimensions	140x243x72 mm
Weight	1500g
Info	72W PSU (30W per output) Is supplied including Remote control, infrared eye and screwdriver.

## Accessories

Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 1,5m	DecaLED® DMX Cable XLR-3, 3m	DecaLED® DMX Cable XLR-3, 6m	DecaLED® DMX Cable XLR-3, 10m
95780370	95780371	95780372	95780373
See pricelist	See pricelist	See pricelist	See pricelist

Cabling	Cabling	Setup Tool	IR eye
DecaLED® DMX Cable XLR-3, 15m	DecaLED® DMX Cable XLR-3, 20m	Setup Tool	IR eye
95780374	95780375	95350247 <b>119</b>	Supplied
See pricelist	See pricelist	See pricelist	See pricelist

Remote control
Remote control
Supplied
See pricelist

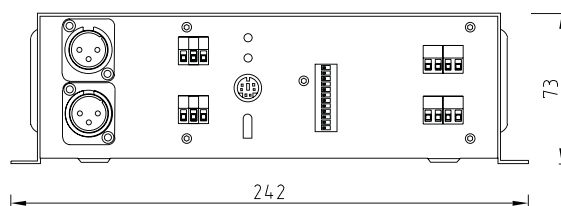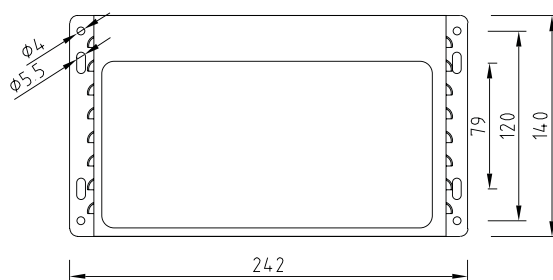

Indoor usage

Tv-proof

Stand alone

Direct DMX512

**DecaLED® Controller 2 Mini**

This controller is suitable for use with the following products

Product	Code	Max. total load	Max. load per output
DecaLED® Flex RGB	95160129	2 reels	1 reel
DecaLED® Flex SC	95160120- 95160128	20 metres	10 metres
DecaLED® Flex RGB HD	95163129	2 reels	1 reel
DecaLED® RGB Strip	95140129	8 pcs	4 pcs
DecaLED® SC strip	95140124 + 95140128	25 pcs	12 pcs
DecaLED® Dot	95102249	100 pcs	50 pcs
DecaLED® Square Quattro W / G / B	95114512 - 95114514	120 pcs	60 pcs
DecaLED® Square Quattro R / A	95114511 + 95114515	100 pcs	50 pcs
DecaLED® Square Duo W / G / B	95112512 - 95112514	200 pcs	100 pcs
DecaLED® Square Duo R / A	95112511 + 95112515	200 pcs	100 pcs
DecaLED® IP Strip RGB 400 mm	95564129	30 pcs	15 pcs
DecaLED® IP Strip SC 530 mm	95565121 - 95565125	20 pcs	10 pcs
DecaLED® IP Strip SC 780 mm	95568124	16 pcs	8 pcs
DecaLED® IP Strip RGB 1000 mm	95565129	14 pcs	7 pcs
DecaLED® IP Strip SC 1000 mm	95569124	14 pcs	7 pcs




 Visit [www.lagotronics.com](http://www.lagotronics.com) for additional information about this product.

**Flashlight Ampco**  
Utrecht, The Netherlands