



Controller 2



DecaLED® Controller 2 Product specification

Code	95350121
Description	DecaLED® Controller 2 for 12V applications
Price	See pricelist
Voltage	100-240V AC
Current	0.9A at 230V AC / 2.0A at 100VAC
Control	DMX512, LagoLED® Fader Panel, Remote control, dipswitches
Setup tool	Optional
LED properties	For all 12VDC LED products
Dimensions	344x167x71 (l x b x h) mm
Weight	2500g
Info	200W PSU (30W per output) Supplied with Remote Control and IR eye

The DecaLED® Controller 2 offers a solution for controlling all dimmable 12VDC LED products. The DecaLED® Controller 2 is ideal for use in small, closed rooms and combines a driver and power supply unit within a single housing.

The DecaLED® Controller 2 is a robust, professional LED controller, which can be used to control LED products that require a supply voltage of 12VDC. The DecaLED® Controller can handle a maximum load of 14A, with a maximum of 3A per output. The controller measures 356 x 167 x 71 mm (l x w x h) and must be connected to a supply voltage of 230VAC.

On the front of the DecaLED® Controller there several DIP switches, with these a DMX address or one of ten programs can be selected.

The DecaLED® Controller 2 is supplied with a remote control and an external infrared eye which enables you to easily recall a number of standard programs or colours from the memory. The Controller 2 can of course also be controlled via DMX. For a professional connection of the DMX signal there are 6 different lengths of XLR cabling available.


We offer a range of accessories for the DecaLED® Controller 2, including starter cables, spare remote controls, a spare infra red eye, and the DecaLED® Setup Tool.

In addition to the DecaLED® Controller 2, we also offer another controller for 12VDC products. This is the DecaLED® Controller 2 Mini, which has 2 outputs for smaller installations that require a limited maximum load.

Accessories

Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 1,5m	DecaLED® DMX Cable XLR-3, 3m	DecaLED® DMX Cable XLR-3, 6m	DecaLED® DMX Cable XLR-3, 10m
95780370	95780371	95780372	95780373
See pricelist	See pricelist	See pricelist	See pricelist
Cabling	Cabling	Setup Tool	IR eye
DecaLED® DMX Cable XLR-3, 15m	DecaLED® DMX Cable XLR-3, 20m	Setup Tool	IR eye
95780374	95780375	95350247 119	Supplied
See pricelist	See pricelist	See pricelist	See pricelist

Remote control
Remote control
Supplied
See pricelist

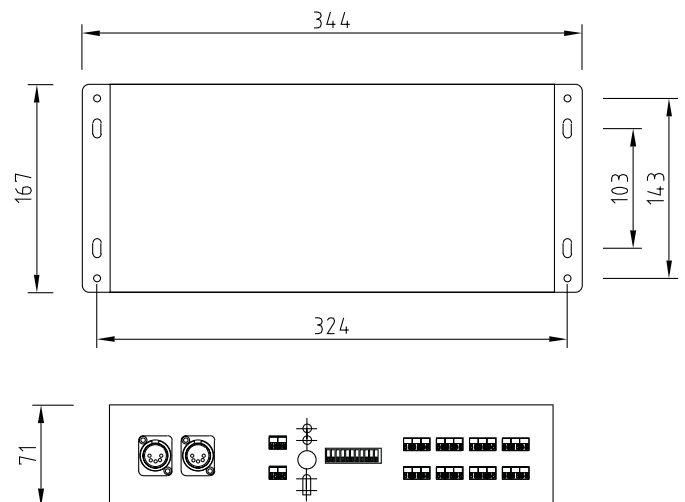


- Indoor usage
- Tv-proof
- Stand alone
- Direct DMX512

DecaLED® Controller 2

This controller is suitable for use with the following products

Product	Code	Max.Total load	Max. load per output
DecaLED® Flex RGB	95160129	8 reels	1 reel
DecaLED® Flex SC	95160120- 95160128	8 reels	1 reel
DecaLED® Flex RGB HD	95163129	8 reels	1 reel
DecaLED® RGB Strip	95140129	24 pcs	5 pcs
DecaLED® SC strip	95140124 + 95140128	70 pcs	15 pcs
DecaLED® Dot	95102249	300 pcs	50 pcs
DecaLED® Square Quattro W / G / B	95114512 - 95114514	350 pcs	75 pcs
DecaLED® Square Quattro R / A	95114511 + 95114515	280 pcs	60 pcs
DecaLED® Square Duo W / G / B	95112512 - 95112514	700 pcs	100 pcs
DecaLED® Square Duo R / A	95112511 + 95112515	560 pcs	100 pcs
DecaLED® IP Strip RGB 400 mm	95564129	120 pcs	20 pcs
DecaLED® IP Strip SC 530 mm	95565121 - 95565125	70 pcs	10 pcs
DecaLED® IP Strip SC 780 mm	95568124	50 pcs	8 pcs
DecaLED® IP Strip RGB 1000 mm	95565129	90 pcs	20 pcs
DecaLED® IP Strip SC 1000 mm	95569124	40 pcs	7 pcs

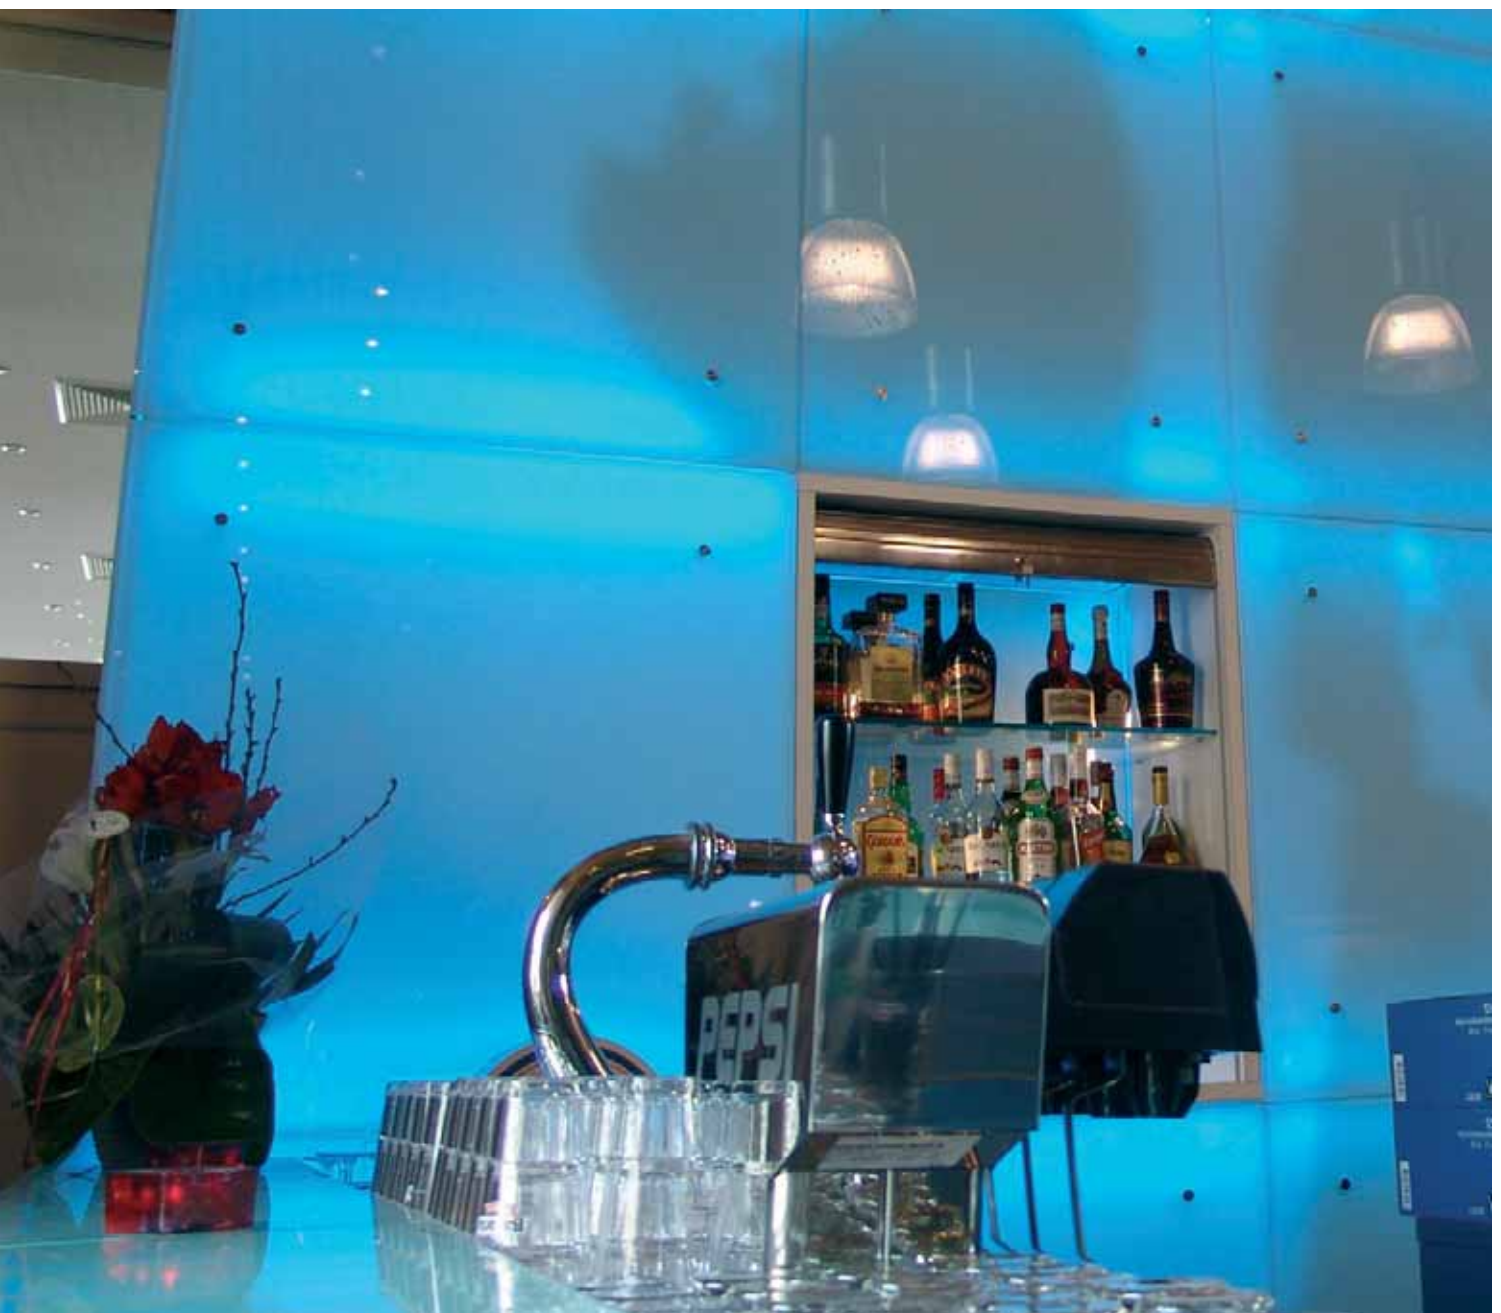

Visit www.lagotronics.com for additional information about this product.

Bavaria House
Helmond, The Netherlands