



# Controller 3 Mini



DecaLED® Controller 3 Mini	
Product specification	
Code	95350246
Description	DecaLED® Controller 3 Mini for 24V applications
Price	See pricelist
Voltage	100-240V AC
Current	0.8A at 230V AC / 1.7A at 100VAC
Power consumption	100W
Control	DMX512, LagoLED® Fader Panel, Remote control, dipswitches
Setup tool	Optional
LED properties	For all 24VDC LED products
Dimensions	243x140x72 mm
Weight	1.65kg
Info	100W PSU (70W per output) Supplied with Remote Control and IR eye

## Accessories

Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 1,5m	DecaLED® DMX Cable XLR-3, 3m	DecaLED® DMX Cable XLR-3, 6m	DecaLED® DMX Cable XLR-3, 10m
95780370	95780371	95780372	95780373
See pricelist	See pricelist	See pricelist	See pricelist

Cabling	Cabling	Setup Tool	IR eye
DecaLED® DMX Cable XLR-3, 15m	DecaLED® DMX Cable XLR-3, 20m	Setup Tool	IR eye
95780374	95780375	95350247 <b>119</b>	Supplied
See pricelist	See pricelist	See pricelist	See pricelist

Remote control
Remote control
Supplied
See pricelist



The DecaLED® Controller 3 Mini offers a solution for controlling all dimmable 24VDC LED products. The DecaLED® Controller 3 Mini is ideal for use in small, closed rooms and combines a driver and a 100W power supply unit within a single housing.

The DecaLED® Controller 3 Mini is the small version of the DecaLED® Controller 3 and is the lightest version of the 24VDC controllers. The Controller 3 Mini is a professional LED controller, which can be used to control LED products that require a supply voltage of 24VDC. The DecaLED® Controller 3 Mini can handle a maximum load of 4A, with a maximum of 3A per output. The controller measures 243 x 150 x 73 mm (l x w x h) and must be connected to a supply voltage of 230VAC. On the front of the DecaLED® Controller there several DIP switches, with these a DMX address or one of ten programs can be selected.

The DecaLED® Controller 3 Mini is supplied with a remote control and an external infrared eye, which enables you to easily recall a number of standard programs or colours from the memory. The Controller 3 Mini can of course also be controlled via DMX. For a professional connection of the DMX signal there are 6 different lengths of XLR cabling available.

We offer a range of accessories for the DecaLED® Controller 3 Mini, including starter cables, spare remote controls, a spare infrared eye, and the DecaLED® Setup Tool.

In addition to the DecaLED® Controller 3 Mini, we also offer two other DecaLED® controllers for 24VDC products. The DecaLED® Controller 3, with 8 outputs for controlling several channels, and the DecaLED® Controller 4, for large-scale installations in which large lengths of LED lighting need to be connected to a single output.

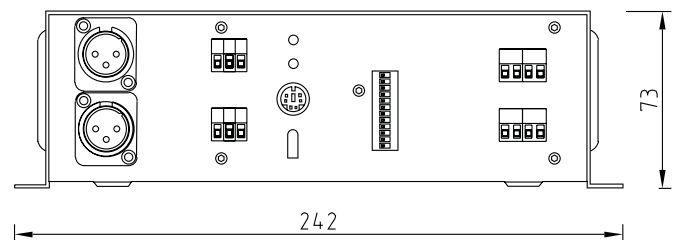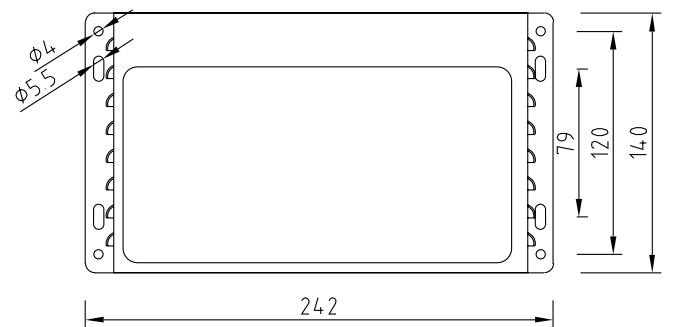


- Indoor usage
- Tv-proof
- Stand alone
- Direct DMX512

**DecaLED® Controller 3 Mini**

This controller is suitable for use with the following products

Product	Code	Max. total load	Max. load per output
LagoLED® RGB Strip 15 cm	95141249	28 pcs	20 pcs
LagoLED® RGB Strip 30 cm	95143249	14 pcs	10 pcs
LagoLED® SC strip 15 cm	Depends on colour	28 pcs	20 pcs
LagoLED® SC strip 30 cm	Depends on colour	14 pcs	10 pcs
LagoLED® DEKO Panel 33*33	95603300	14 pcs	10 pcs
LagoLED® DEKO Panel 48*48	95603450	4 pcs	3 pcs
LagoLED® DEKO Panel 63*63	95603600	3 pcs	2 pcs
LagoLED® DEKO Panel 123*63	95603610	1 pcs	1 pcs
DecaLED® Cove Flex RGB	95166249	11 metres	8 metres
DecaLED® Cove Flex SC	Depends on colour	26 metres	6 metres
DecaLED® Cove Flex SC SE	Depends on colour	26 metres	6 metres
DecaLED® Neon Flex RGB	95166234	8 metres	6 metres

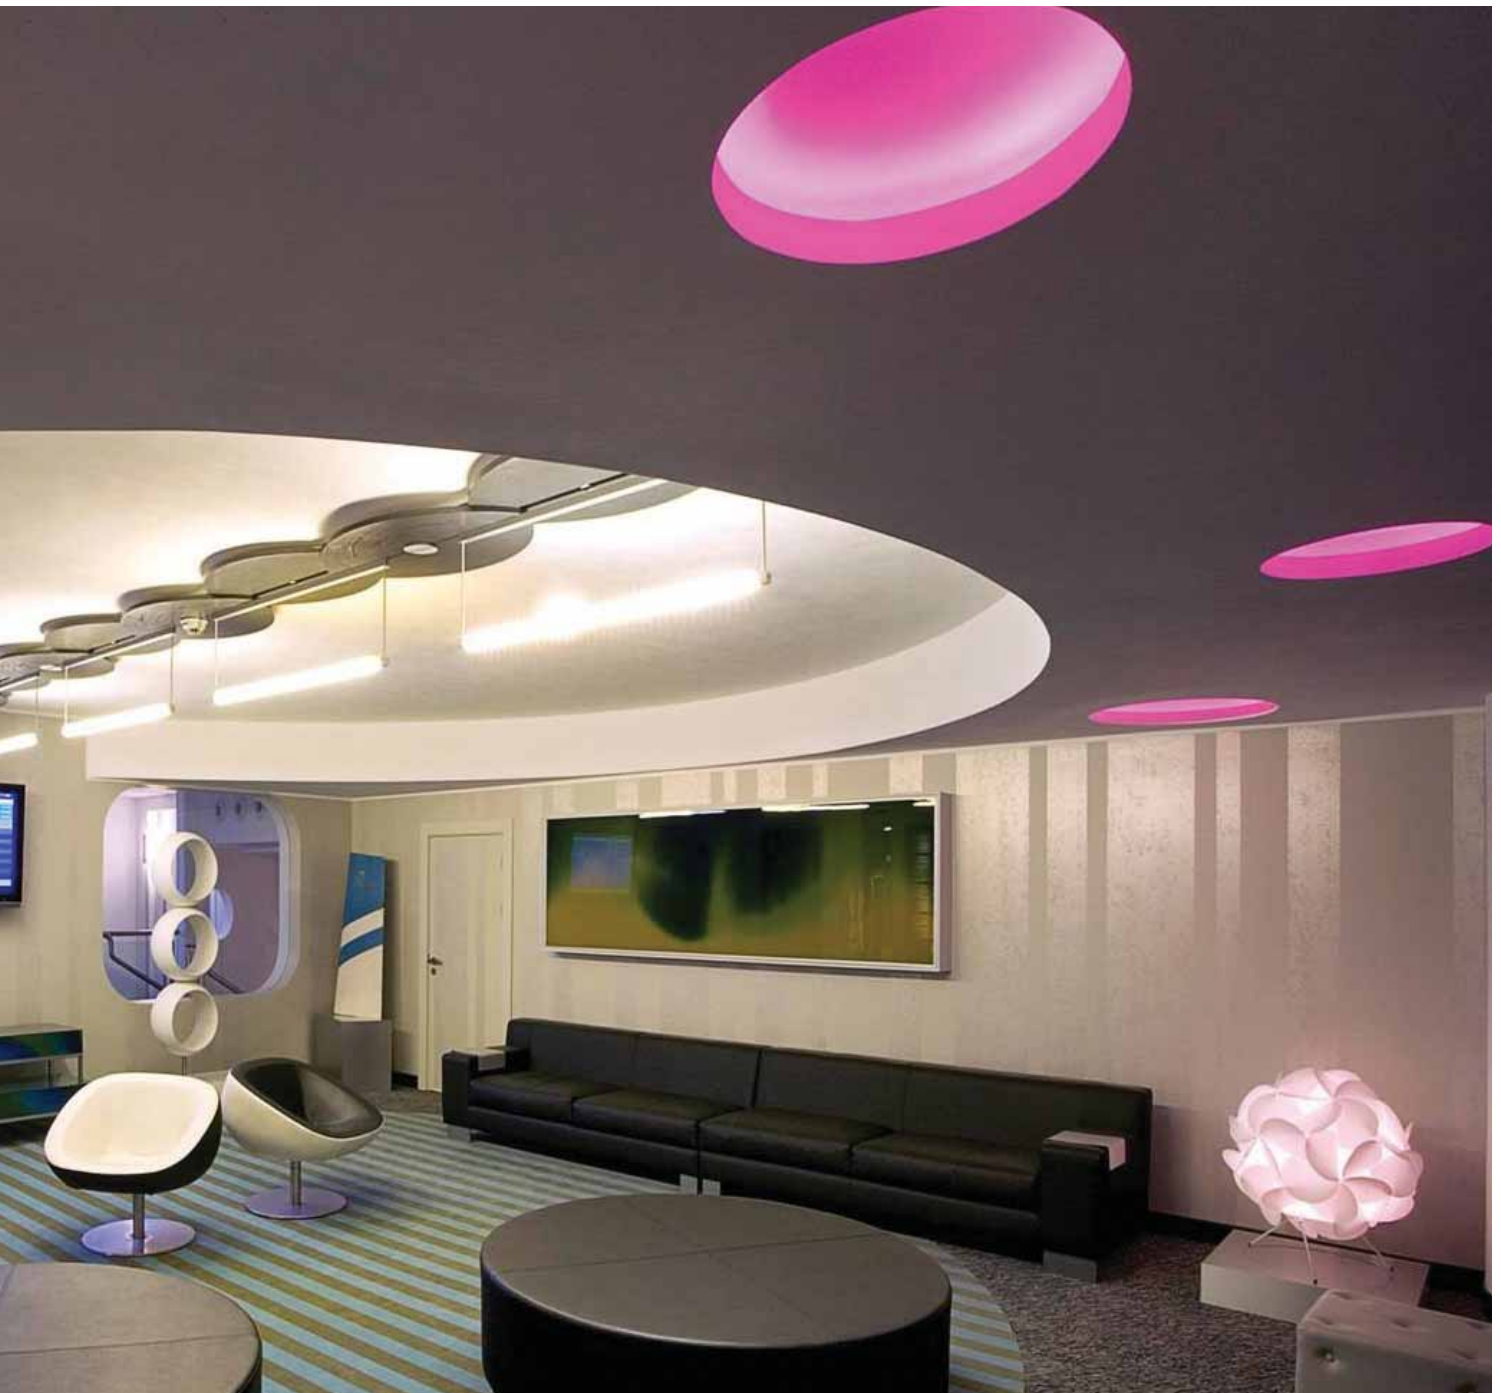

Visit [www.lagotronics.com](http://www.lagotronics.com) for additional information about this product.

**Airport Hotel Cork**  
Cork, Ireland