

Controller 3



The DecaLED® Controller 3 offers a solution for controlling all dimmable 24VDC LED products. The DecaLED® Controller 3 is ideal for use in small, closed rooms and combines a driver and power supply unit within a single housing.

The DecaLED® Controller 3 is a robust, professional LED controller, which can be used to control LED products that require a supply voltage of 24VDC. The DecaLED® Controller 3 can handle a maximum load of 12.5A, with a maximum of 3A per output. The controller measures 356 x 183 x 71 mm (l x w x h) and must be connected to a supply voltage of 230VAC. On the front of the DecaLED® Controller there several DIP switches, with these a DMX address or one of ten programs can be selected.

The DecaLED® Controller 3 is supplied with a remote control and an external infrared eye, which enables you to easily recall a number of standard programs or colours from the memory. The Controller 3 can of course also be controlled via DMX. For a professional connection of the DMX signal there are 6 different lengths of XLR cabling available.

We offer a range of accessories for the DecaLED® Controller 3, including starter cables, spare remote controls, a spare infrared eye, and the DecaLED® Setup Tool.


In addition to the DecaLED® Controller 3, we also offer two other DecaLED® controllers for 24VDC products. The DecaLED® Controller 3 Mini, for smaller installations that require only a limited load, and the DecaLED® Controller 4, for large-scale installations in which large lengths of LED lighting need to be connected to a single output.

DecaLED® Controller 3	
Product specification	
Code	95350244
Description	DecaLED® Controller 3 for 24V applications
Price	See pricelist
Voltage	100-240V AC
Current	1.5A at 230V AC and 3.1A at 100V AC
Power consumption	300W
Control	DMX512, LagoLED® Fader Panel, Remote control, dipperswitches
Setup tool	Optional
LED properties	For all 24VDC LED products
Dimensions	356x183x71 mm
Weight	2900g
Info	300W PSU (75W per output) Supplied with Remote Control and IR eye

Accessories

Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 1,5m	DecaLED® DMX Cable XLR-3, 3m	DecaLED® DMX Cable XLR-3, 6m	DecaLED® DMX Cable XLR-3, 10m
95780370	95780371	95780372	95780373
See pricelist	See pricelist	See pricelist	See pricelist
Cabling	Cabling	Setup Tool	IR eye
DecaLED® DMX Cable XLR-3, 15m	DecaLED® DMX Cable XLR-3, 20m	Setup Tool	IR eye
95780374	95780375	95350247 119	Supplied
See pricelist	See pricelist	See pricelist	See pricelist

Remote control
Remote control
Supplied
See pricelist

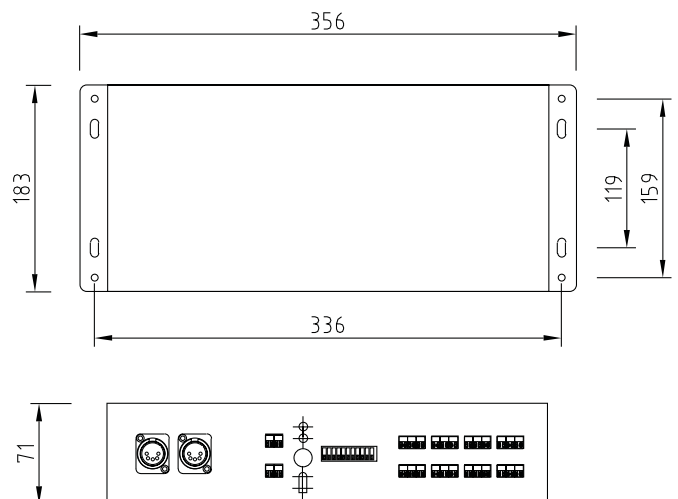

- Indoor usage
- Tv-proof
- Stand alone
- Direct DMX512

DecaLED® Controller 3

This controller is suitable for use with the following products

Product	Code	Max. total load	Max. load per output
LagoLED® RGB Strip 15 cm	95141249	80 pcs	20 pcs
LagoLED® RGB Strip 30 cm	95143249	40 pcs	10 pcs
LagoLED® SC strip 15 cm	Depends on colour	80 pcs	20 pcs
LagoLED® SC strip 30 cm	Depends on colour	40 pcs	10 pcs
LagoLED® DEKO Panel 33*33	95603300	40 pcs	10 pcs
LagoLED® DEKO Panel 48*48	95603450	24 pcs	3 pcs
LagoLED® DEKO Panel 63*63	95603600	10 pcs	2 pcs
LagoLED® DEKO Panel 123*63	95603610	5 pcs	1 pcs
LagoLED® Dance Floor	95660100	2 pcs	0.25 pcs
DecaLED® Cove Flex RGB	95166249	35 metres	8 metres
DecaLED® Cove Flex SC	Depends on colour	80 metres	6 metres
DecaLED® Cove Flex SC SE	Depends on colour	80 metres	6 metres
DecaLED® Neon Flex RGB	95166234	25 metres	6 metres



Visit www.lagotronics.com for additional information about this product.

Cadillac exhibition booth
Toronto, Canada