

# Display Wash 78

The DecaLED® DisplayWash 78 is a high quality, multicoloured LED fixture for applications in exhibition rooms, shows and shop windows. By incorporating RGB, cool white and warm white LEDs, it is possible to control the colour temperature very precisely.

The DecaLED® Display Wash 78 is equipped with 30 cool white, 30 warm white and 18 RGB SMD high quality LEDs. The combination of LEDs is ideal for applications in which a very specific colour temperature is required. The DecaLED® Display Wash 78 is equipped with barn doors to regulate the light of the 78 LEDs and a 230VAC connection which can be easily replaced with a phase rail adapter. The Display Wash 78 can be easily controlled from a distance by means of the remote control provided or the XLR 3 connectors. Permanent installations comprise a display with touch buttons that enable the user to select the colour or program of the DecaLED® Display Wash 78.

Various accessories are available for the DecaLED® Display Wash 78, including spare remote controls, adapters for the International LightACTS phase rail and XLR cables.

Products such as the LagoLED® BEAM.111 are also suitable for similar applications. For further information, please see page 23.




### DecaLED® Display Wash 78

Product specification

Code	95120959
Omschrijving	DecaLED® Display Wash 78
Price	See pricelist
Voltage	100-240VAC
Current	660mA
Power consumption	18W
Control	DMX512, Remote control
Connections	1m cable with 230V connector
Colour range	Full RGB
LED properties	30 cool white, 30 warm white and 18 RGB LEDs
Housing	Powder coated aluminium
Beam angle	90x100°
Expected lifespan	50.000 hours
Ambient temperature	0°C to 50°C
Storage temperature	-40°C to 70°C
Lenses	PMMA diffuser
Light distribution	Symmetrical direct illumination
Dimensions	285.75x151x151 mm (L x B x H)
Weight	1.5Kg
Info	Remote control included

Remote control	Phase rail	Cabling	Cabling
95321044	Various	DecaLED® DMX Cable XLR-3, 1,5m 95780370	DecaLED® DMX Cable XLR-3, 3m 95780371
See pricelist		See pricelist	See pricelist
Cabling	Cabling	Cabling	Cabling
DecaLED® DMX Cable XLR-3, 6m 95780372	DecaLED® DMX Cable XLR-3, 10m 95780373	DecaLED® DMX Cable XLR-3, 15m 95780374	DecaLED® DMX Cable XLR-3, 20m 95780375
See pricelist	See pricelist	See pricelist	See pricelist

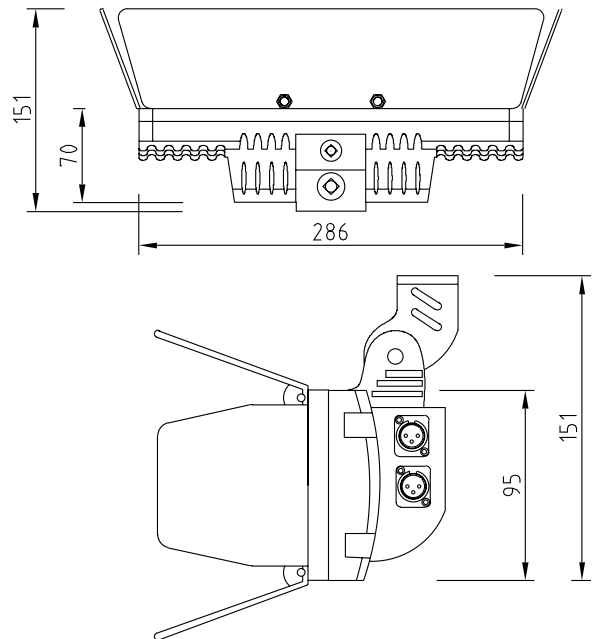

- Indoor usage
- RGB
- Direct DMX

230VAC



LagoLED®  
Fader Panel



DecaLED®  
Display Wash 78

Or any other device  
that can provide a  
DMX512 signal



Visit [www.lagotronics.com](http://www.lagotronics.com) for  
additional information about this product.

**DIT Bouw en Techniek**  
Venlo, The Netherlands