



Video Tile 25



DecaLED® Video Tile 25

Product specification

Code	95122249
Description	DecaLED® Video Tile 25, 24VDC
Price	See pricelist
Control	DecaLED® Video Driver Pro 36
LED properties	SMD three-in-one chip, 25mm pixel distance
Dimensions	200 x 200 x 37 mm
Weight	800g
Info	Needs PSU + driver

Accessories

Control	PSU
Video Driver Pro 36 95322241	PSU for Video Tile 95792400
See pricelist	See pricelist

Video Frame 12



DecaLED® Video Frame 12


Product specification

Code	95123249
Description	DecaLED® Video Frame 12
Price	See pricelist
Control	DecaLED® Video Driver Pro 36
LED properties	SMD three-in-one chip
Dimensions	800 x 600 x 147 mm
Info	Built-in PSU

The DecaLED® Video Tile 25 is a square LED module that can be easily assembled to create a custom design video wall. The DecaLED® Video Tile 25 is highly suitable for (indoor) applications in office buildings, discos, clubs, and food and drink outlets.

The DecaLED® Video Tile 25 is equipped with 25 RGB-SMD LEDs, which are integrated into a square polycarbonate housing, and is supplied with a removable opal cover. The LEDs on the DecaLED® Video Tile 25 have a beam angle of 110° and a total power consumption of 12W per tile. DecaLED® Video Tiles must be connected to the DecaLED PSU for Video Tiles. This PSU supplies the power to and controls the Video Tiles by means of the Arkaos software and the DecaLED® Video Driver Pro 36. This software and power supply can be used to easily control the DecaLED® Video Frame 12 via your PC.

Various accessories are available, including special power supplies (with signal input and output), link cables and additional opal covers. You can combine 12 DecaLED® Video Tiles in the DecaLED® Video Frame 12.

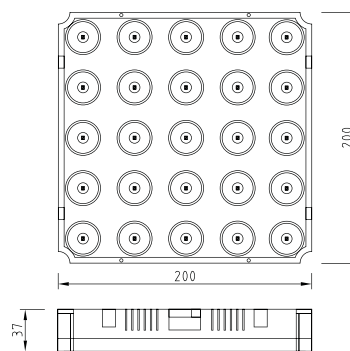

The DecaLED® Video Frame 12 comprises 12 DecaLED® Video Tiles 25 in a single frame with an integrated power supply.


The characteristics of the DecaLED® Video Frame 12 include the easy means of attachment and its sturdiness. The frame enables you to construct a video wall more quickly.

In total, a DecaLED® Video Frame 12 measuring 800x600mm comprises 300 RGB-SMD LEDs. The DecaLED® Video Frame 12 has an image ratio of 4:3 and is equipped with 12 of the Video Tile 25 and a power supply. It is extremely easy to control the DecaLED® Video Frame 12 via your PC, by using the Arkaos software and the DecaLED® Video Driver Pro 36. For further information, please contact one of our product specialists.

Various accessories are available, including special power supplies (with signal input and output), link cables and additional opal covers.

- Indoor usage
- RGB
- Direct DMX

DecaLED® lighting products

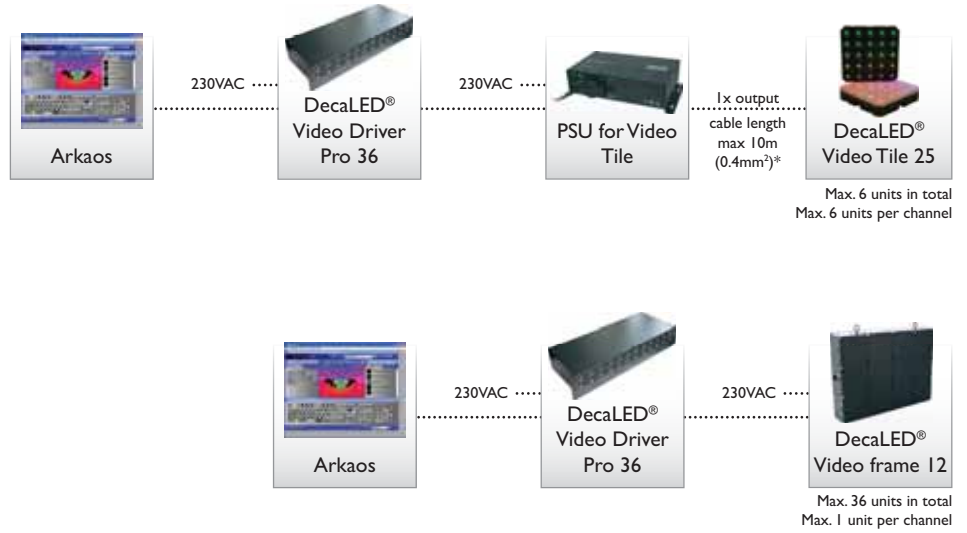

* For installations that require longer cable lengths please contact your sales representative or calculate this using the product information



Visit www.lagotronics.com for additional information about this product.

Zomerparkfeest
Venlo, The Netherlands