



Cove Flex RGB

Waterproof IP55



DecaLED® Cove Flex RGB

Product specification

Code	95166249		
Description	DecaLED® Cove Flex RGB, 24VDC, 35 RGB LEDs p/m		
Price	See pricelist		
Voltage	24VDC		
Current	0.3A p/m		
Power consumption	7.2W p/m		
Max. chainable	20m		
Current at max. chain	6A		
Power cons. at max. chain	144W		
Control	DecaLED® Controller 3	DecaLED® Controller 3 Mini	DecaLED® Controller 4
Max. per controller	40	14	40
Max. per output	10	10	20
LED properties	SMD three-in-one chip		
Ambient temperature	-20°C tot 40°C		
Dimensions	18 x 11 x variabele mm		
Weight	100g p/m, reel length: 50m		
Info	35 LEDs p/m, cuttable per 20cm sections		

Accessories

Control	Control	Control	Cabling
Controller 3	Controller 3 Mini	Controller 4	Starter cable 30cm
95350244 109	95350246 111	95350245 113	95745301
See pricelist	See pricelist	See pricelist	See pricelist

Cabling	Cabling	Connectors	Connectors
Starter cable 5m	Link cable 40cm	Inline connector	End cap
95745501	95745305	95745805	95745800
See pricelist	See pricelist	See pricelist	See pricelist

Bracket	Profile
Mounting clip	Mounting profile 1m
95745505	95745506
See pricelist	See pricelist

DecaLED® Cove Flex RGB is a flexible, multicoloured, waterproof LED tube, which is primarily suitable for cove lighting, mood lighting and indirect lighting, and for both indoor and outdoor applications.



DecaLED® Cove Flex RGB comprises 35 SMD LEDs per metre and is fully sealed in a transparent, UV and IR-resistant strip. The result is a bendable, impact-resistant, maintenance-free and waterproof (IP55) product, with a beam angle of 105° and a power consumption of 7.2W/m. These 24VDC strips measure 11x18mm (h x w) and they can be daisy chained up to a maximum length of 10 metres per channel when using the DecaLED® Controller 3, and up to a maximum of 20 metres per channel when using the DecaLED® Controller 4.

We have various accessories available in stock, including starter and link cables, inline connectors and mounting clips. Upon request, the DecaLED® Cove Flex RGB can be fitted into the 20 or 40mm DecaLED® Universal Profile.

In addition to the RGB version, single colour versions of this product are also available: the DecaLED® Cove Flex SC and DecaLED® Cove Flex SC SE in red, green, blue, amber, warm white and cool white. You can find these products on page 43 and 45.

The rear is covered with double-sided 3M tape to facilitate easy and rapid installation.

A demo set of this product is available. Please see page 126 of this catalogue.


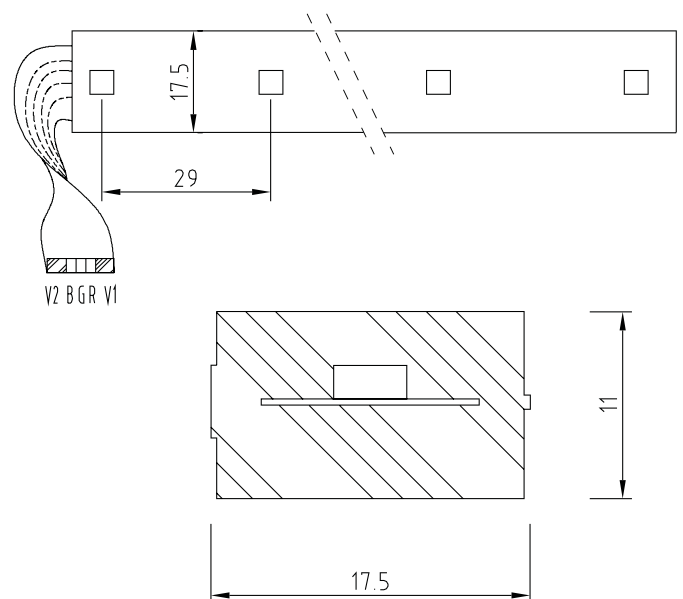
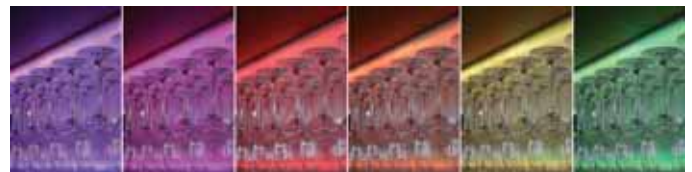


Waterproof IP55

RGB

Demo set page 126

DecaLED® lighting products

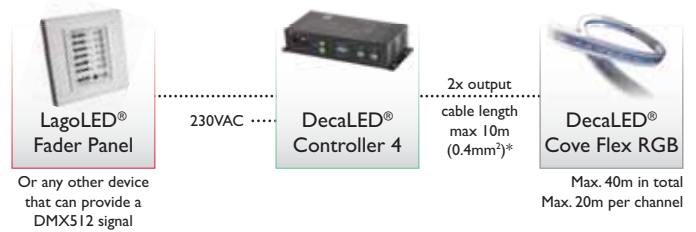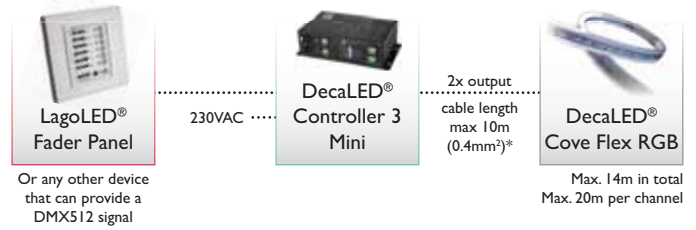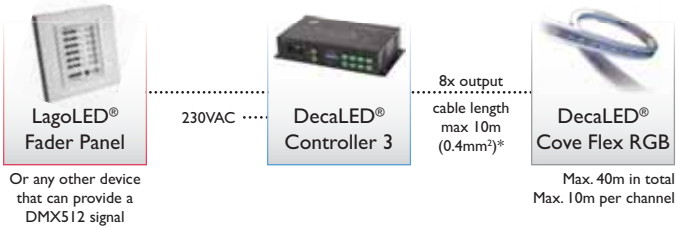

* For installations that require longer cable lengths please contact your sales representative or calculate this using the product information



Visit www.lagotronics.com for additional information about this product.

Muziekkwartier
Enschede, The Netherlands