

Driver TV 12/24



The DecaLED® Driver TV 12/24 was designed to control all dimmable 12 or 24VDC LED products. This driver is ideal for use in small, closed rooms and can only be used in combination with a separate 12 or 24VDC power supply.

The DecaLED® Driver TV 12/24 is a small driver which does not have its own power supply unit, which can be used to control a range of different LagoLED® and DecaLED® LED products. The DecaLED® Driver TV 12/24 can be equipped with a 12VDC or 24VDC power supply, depending on the LED product to be controlled. The DecaLED® Driver TV 12/24 has 24 separate channels. The maximum load of the driver is 3A per output and, in total, a maximum of 12A can be controlled by the driver. The driver measures 147 x 115 x 40 mm (l x w x h). You can use the DecaLED® Setup Tool (page 123) to program the Driver to a DMX start address, or to run one of the 10 standard programs. The intensity and speed of these programs can be adjusted.

Various accessories are available for the DecaLED® Driver TV 12/24, including starter cables, 12 and 24VDC power supply units and the DecaLED® Setup Tool.

The DecaLED® Controllers 2 and 2 Mini were developed as a solution with an integrated 12VDC power supply and driver. These controllers can be found on pages 105 and 107.

The DecaLED® Controllers 3, 3 Mini and 4 were developed as a solution with an integrated 24VDC power supply unit and driver. These controllers can be found on pages 109, 111 and 113.



DecaLED® Driver TV 12/24

Product specification

Code	95340001
Description	DecaLED® Driver TV 12/24
Price	See pricelist
Voltage	12VDC / 24VDC
Current	Total 12.5A, max 3A per output
Power consumption	150W at 12V / 300W at 24V
Connection	8 outputs, max 24 channels
Dimensions	149 x 11 x 48 mm
Weight	0.5kg
Info	Including 8 50cm starter cables

Accessories

Setup Tool	PSU	Cabling	Cabling
Setup Tool	24VDC PSU	Link cable 10cm	Link cable 15cm
95350247 119	Various 122	95750300	95750302
See pricelist	See pricelist	See pricelist	See pricelist
Cabling	Cabling	Cabling	Cabling
Link cable 50cm	Link cable 1m	Link cable 3m	Link cable 10m
95750303	95750304	95750306	95750399
See pricelist	See pricelist	See pricelist	See pricelist
Cabling	Cabling	Cabling	Cabling
Starter cable 50cm	Starter cable 1m	Starter cable 3m	Starter cable 5m
95750305	95750310	95750330	95750350
See pricelist	See pricelist	See pricelist	See pricelist

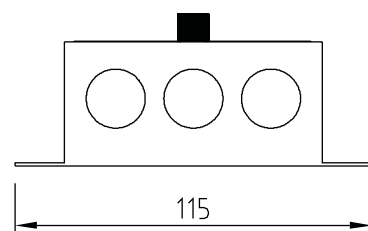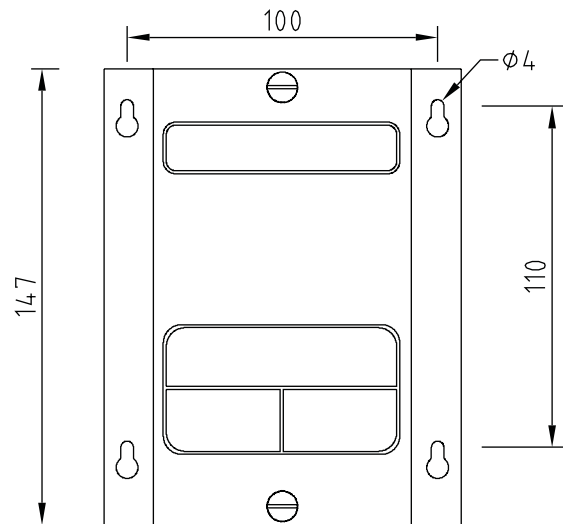

- Indoor usage
- tv-proof
- Stand alone
- Direct DMX512

DecaLED® Driver TV 12/24

This product is suitable for use with the following 12VDC products

Product	Per controller	Per output
DecaLED® Flex RGB	8 reels	1 reel
DecaLED® Flex SC	8 reels	1 reel
DecaLED® Flex RGB HD	8 reels	1 reel
DecaLED® RGB Strips	24 pcs	5 pcs
DecaLED® SC Strips	70 pcs	15 pcs
DecaLED® Dot	300 pcs	50 pcs
DecaLED® Square Quattro W, G and B	4 reels	1 reel
DecaLED® Square Quattro R and A	3 reels	1 reel
DecaLED® Square Duo W, G and B	8 reels	1 reel
DecaLED® Square Duo Red, Amber	6 reels	1 reel
DecaLED® IP Strip RGB 400 mm	120 pcs	20 pcs
DecaLED® IP Strip SC 530 mm	70 pcs	10 pcs
DecaLED® IP Strip SC 780 mm	50 pcs	8 pcs
DecaLED® IP Strip RGB 1000 mm	40 pcs	7 pcs
DecaLED® IP Strip SC 1000 mm	40 pcs	7 pcs

DecaLED® Driver TV 12/24

This product is suitable for use with the following 24VDC products

Product	Per controller	Per output
LagoLED® RGB Strip 15 cm	80 pcs	20 pcs
LagoLED® RGB Strip 30 cm	40 pcs	10 pcs
LagoLED® SC Strip 15 cm	80 pcs	20 pcs
LagoLED® SC Strip 30 cm	40 pcs	10 pcs
LagoLED® DEKO Panel 33 x 33	40 pcs	10 pcs
LagoLED® DEKO Panel 48 x 48	24 pcs	3 pcs
LagoLED® DEKO Panel 63 x 63	10 pcs	2 pcs
LagoLED® DEKO Panel 123 x 63	5 pcs	1 pcs
LagoLED® Dance Floor	2 pcs	0.25 pcs
DecaLED® Cove Flex RGB	40 metres	10 metres
DecaLED® Cove Flex SC	40 metres	6 metres
DecaLED® Cove Flex SC SE	40 metres	6 metres
DecaLED® Neon Flex RGB	25 metres	6 metres



Visit www.lagotronics.com for additional information about this product.

Slavenburg interieurontwerp
Amsterdam, The Netherlands