



Rebel Driver



The new DecaLED® Rebel Driver has been specially developed to allow control of a maximum of 12 DecaLED® Rebel Modules.

Like the other DecaLED® drivers, this product can be used to control modules via DMX and offers a choice of ten stand-alone programs. The speed, fade time and light intensity of all of these standard programs can be adjusted. Furthermore, the DecaLED® Setup Tool can be used to assign each driver a separate DMX address.

The DecaLED® Rebel Driver requires a 90-230VAC power supply and a DMX512 signal. A DMX output is provided to allow multiple DecaLED® Rebel Drivers to be linked together, or for other controllers that require a DMX signal.


If you wish to run a single, standard program on a number of connected drivers, the DMX lines must be connected in master-slave mode. To that end, the first driver must be set to run the standard program. All subsequent drivers must be assigned to DMX address "1" and must be configured to run in "1 RGB" mode. They will then imitate the first driver.

Please note that the DecaLED® Rebel Driver has no TV-proof technology and the DecaLED® Rebel Modules will produce interference with professional cameras. Please use a DecaLED® High Power DMX Controller to prevent interference.

DecaLED® Rebel Driver

Product specification

Code	95390351
Description	DecaLED® Rebel Driver
Price	See pricelist
Voltage	90-265V AC
Power consumption	60W
Control	DMX512
Signal input	DMX512, 3-pin terminal socket
Signal through	3-pin terminal socket
Signal output	1 pcs 5-pin terminal sockets 3x350mA per output. A terminator is required for the last Rebel Module.
Housing	Polycarbonate
Operating temperature	-10°C to +50°C
Storage temperature	-20°C to +70°C
Dimensions	205x56x50 (l x b x h) mm
Weight	0.8kg
IP68 rating	IP20
Certification	CE

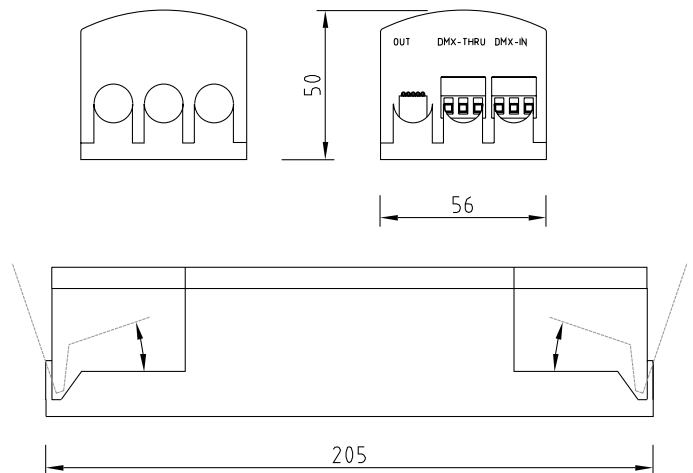

- Indoor usage
- Stand alone
- Direct DMX512

DecaLED® Rebel Driver

This controller is suitable for use with the following products

Product	Code	Max. total load	Max. load per output
DecaLED® Rebel Module with lenses	95107509	12	12
DecaLED® Rebel Module no lenses	95107519	12	12



Visit www.lagotronics.com for additional information about this product.

Holland Casino Utrecht
Utrecht, The Netherlands